




# COMPACT

## SMALL AND FUNCTIONAL CONICAL LUMINAIRE

The COMPACT features a diffuser with an ice-structured finish. The COMPACT is available with different lens configurations so the illumination profile can be tailored to any situation. This in turn ensures an optimal light output. New LED lighting solutions can be easily and quickly fitted in the luminaire. This makes the COMPACT a sustainable, functional and future-proof solution for your application environment.

### DIMENSIONS COMPACT in mm

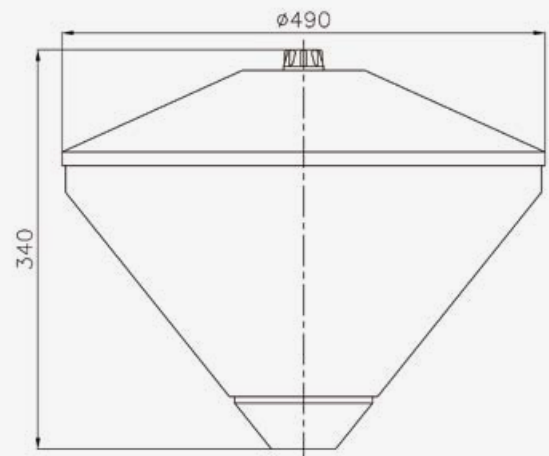

### Application areas



CAMPING AREAS



PEDESTRIAN AND CYCLE PATHS



RECREATIONAL AREAS



RESIDENTIAL STREETS

### Characteristics



IP 65

IK 10

CE

#### PRODUKTSPEZIFIKATIONEN

- UV-stabilised polycarbonate top cover, black (RAL 9005)
- Light cover UV-stabilised polycarbonate, ice-structured finish
- UniCliq unit
- Pole-mounted size: 60 mm
- Mass:  $\pm 8$  kg (depends on model)
- Wind surface:  $\pm 0.11$  m<sup>2</sup>
- Safety class: I
- Assembly-, installation- and maintenance-friendly
- Voltage: 230 / 240 V, 50 Hz
- CRI: > 70
- Colour temperature neutral white (4000K) or warm white (3000K)
- Expected lifespan 100.000 hours at T environment = 25°C (L96/F10)
- Other lens configurations

#### OPTIONEN

- Opal light cover
- Other RAL colour
- Dali
- Safety class: II
- Constant Lumen Output (CLO)

#### UNICLIQ LED-UNIT

The COMPACT can be easily equipped with the latest lighting technology thanks to the UniCliq unit.



Lightronics supplies its luminaires as standard as Easy Light, with five standard dimming schedules (1A, 2A, 3A, 4A or 5A) that can switch capacity and brightness based on pre-set times.

COMPACT | LED<sup>2</sup>WELL CORE OUR STANDARD LIGHTING SOLUTION

		3000K		4000K	
Number of LEDs	Lumen	LED-power (W)	System power (W)	LED-power (W)	System power (W)
16	800	5,7	8,0	5,5	7,7
	1050	6,8	9,0	6,3	8,6
	1200	7,5	9,8	7,2	9,5
	1350	8,1	10,5	7,9	10,2
	1500	8,8	11,2	8,5	10,9
	1600	9,3	11,7	9,0	11,4
	1800	10,4	12,8	10,0	12,4
	2000	11,2	13,7	10,6	13,1
	2150	12,4	14,9	11,5	13,9
	2300	13,5	16,1	12,6	15,1
	2500	14,8	17,5	14,2	16,8
	2750	16,6	19,4	15,7	18,5
	3000	18,5	21,4	17,3	20,1

LED (ICE-STRUCTURED FINISH)

