



EX-ROHR LED

Industrial luminaire

- ▶ Explosion-proof
- ▶ Chemical industry
- ▶ Refineries
- ▶ Laboratoria



EX-ROHR LED

INDUSTRIAL LUMINAIRE

PRODUCT SPECIFICATIONS


- ▶ Light cover: UV-stabilised polycarbonate
- ▶ Polycarbonate housing
- ▶ E-VSA
- ▶ Explosion protection class: II 2 G / Ex ed / II C T4 for Zone 1, 2 (Gas) II 2 D T110°C Zone 21, 22 (dust)only for 36 and 58 Watt
- ▶ Temperature class: T4
- ▶ TC -20°C till +40°C
- ▶ Assembly-, installation- and maintenance-friendly
- ▶ Safety class: I
- ▶ Voltage: 220/240 V, 50/60 Hz

OPTIONS

- ▶ Several versions and settings possible
- ▶ Several closures possible
- ▶ Zone 2, 22 for 36 and 58 Watt
- ▶ Mounting clamps rope + chain (V2A)
- ▶ Pipe clamps wall + ceiling (VA)
- ▶ Spare parts
- ▶ Closure without entry
- ▶ Closure with M20 x 1.5
- ▶ Lock with Y-fitting



DIMENSIONS EX-ROHR LED IN MM

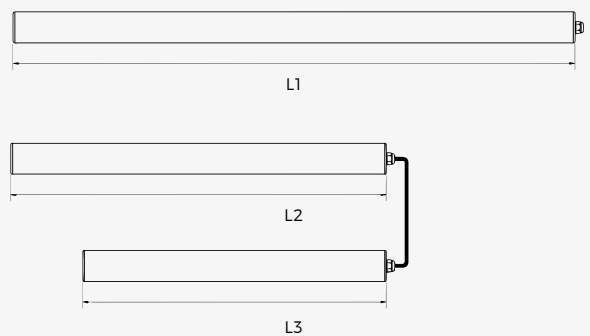

CHARACTERISTICS

IP 68

IK 10



More information?
SCAN THE QR-CODE!

EX-ROHR LED				
Lumen	Housing	L1 (mm)	L2 (mm)	L3 (mm)
Ex-Rohr 1100 lumen	2	1272		
Ex-Rohr 1100 lumen, external driver	2		788	642
Ex-Rohr 3100 lumen	4	1917		
Ex-Rohr 3100 lumen, external driver	4		1433	642
Ex-Rohr 5000 lumen	4	1917		
Ex-Rohr 5000 lumen, external driver	4		1433	642