

WALL AND CEILING LIGHTING - HOGRO PLUS

Impactproof design-luminaire



GEO

Application areas



Entrance



Entrance halls



Stair wells



Galleries



Front doors

Housing: aluminium coated (DB703) or RAL 9010


Light source: LED

≥2 x IK 10

IP 65



Dimensions in mm:

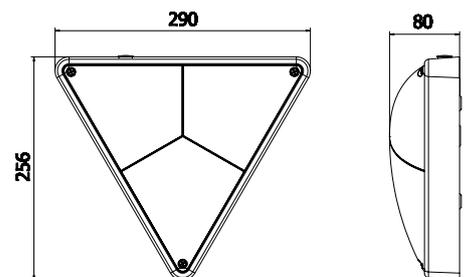

* Option


Technical specifications



	LIGHT SOURCE LED	LUMEN OUTPUT (LM)	EXPECTED LIFESPAN HR
GEO I	LED	440	100,000
GEO II	LED	840	100,000
GEO III	LED	1250	100,000

OPTIONS
Colour temperature warm white (3000K)
Other RAL colour
Seperate cover opal
Safety class II

GEO Opal LED



Product specifications

- light cover: UV-stabilised polycarbonate opal or frosted
- dimensions (lxbxh): 290 x 256 x 80 mm
- voltage: 230/240 V, 50 Hz
- cable entry at the back
- assembly-, installation- and maintenance-friendly
- CRI: > 80
- special coating for coastal areas
- colour temperature neutral white (4000K)
- lifespan LED (driver + LED) 100,000 Hrs at T-ambient is 25 °C (L70/F10)

Visit our website for the most up to date information

www.lightronics.eu

