

STREET AND SITE LIGHTING

Functional pole top luminaire




UniCliq LED unit

* Option

KBM

Application areas




Top cover: UV-stabilised polycarbonate, batch-dyed

Light cover: UV-stabilised polycarbonate

Light source: LED, TC-L, HSE-I, HSE-E/HST



Dimensions in mm:

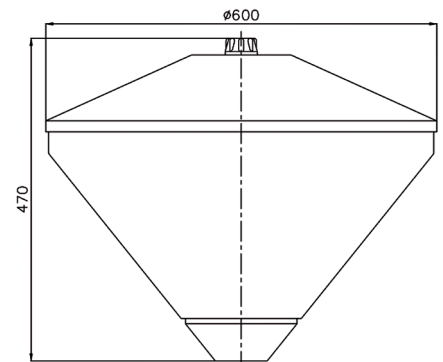

Technical specifications




LED	LUMEN LED	LED (W)	SYSTEM (W)
16	800	5.8	8
16	1050	6.2	8.4
16	1200	6.9	9.1
16	1350	7.8	10
16	1500	8.8	11
16	1600	9.7	11.9
16	1800	11.1	13.2
16	2000	11.9	14
16	2150	12.8	14.9
16	2300	13.4	15.5
16	2500	14.8	16.9
16	2750	16.3	18.4
16	3000	17.9	20

LIGHT SOURCE OTHER	POWER (W)
TC-L	1 or 2 x 18
TC-L	1 or 2 x 24
TC-L	1 or 2 x 36
HSE-I	1 x 50
HSE-I	1 x 70
HSE-E/HST	1 x 50
HSE-E/HST	1 x 70
Fitting	E27

TC-L 24 W	
Eav / Uh	3 lux / 0.25 Uh
Profile width	6 meter + 2 meter sidewalk
Post height	4 meter
Post distance	23 meter

TC-L 36 W	
Eav / Uh	3 lux / 0.2 Uh
Profile width	6 meter + 2 meter sidewalk
Post height	4 meter
Post distance	31 meter

TC-L, 1 x 24 Watt



Product specifications

- light cover polycarbonate lens, ice-structured finish
- polycarbonate top cover, batch-dyed black (RAL 9005) or grey (RAL 7032)
- pole-mounted size: 60 mm
- mass: ± 8 kg (depends on model)
- wind surface: ± 0.15 m²
- UniCliq unit
- safety class: I
- assembly-, installation- and maintenance-friendly
- voltage: 230/240 V, 50 Hz
- CRI: > 70
- colour temperature neutral white (4000K) or warm white (3000K)
- expected lifespan 100,000 Hrs (L80/F10)

Options

- opal light cover (not possible with Comfort or Monowide mirror optics)
- fixture size 76 mm
- other RAL colour
- conical or tapered post, excl. junction box
- dimmable
- safety class: II
- various lens configurations (only for LED)

Visit our website for the most up to date information

www.lightronics.eu

