WALL AND CEILING LIGHTING - IMPACTPROOF

Waterjet-proof surface-mounted luminaire

EASY LIGHT

PGA II

Application areas

Car parks | Industrial buildings | Technical rooms

Housing: impactproof, flame-retardant, UV-stabilised polycarbonate RAL 7032
Light source: LED

IP 66 | ≥1 x IK 10 | CE

Dimensions in mm:

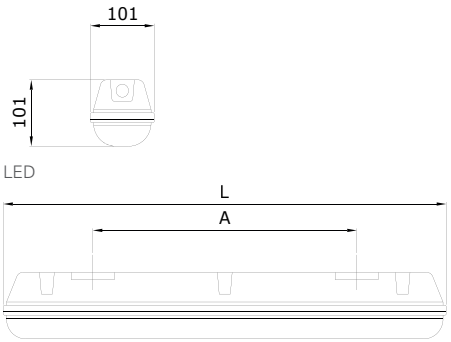

Technical specifications

LIGHT SOURCE	LUMEN OUTPUT (LM)	REFLECTOR	SIZE L (MM)	SIZE A (MM)	EXPECTED LIFESPAN HR
LED	1300, 2200	symmetrical	660	390	100.000
LED	3600, 4400, 5000, 6000, 6500	symmetrical	1277	800	100.000
LED	7000, 8000, 8800	symmetrical	1573	1100	100.000

PGA II Frosted LED

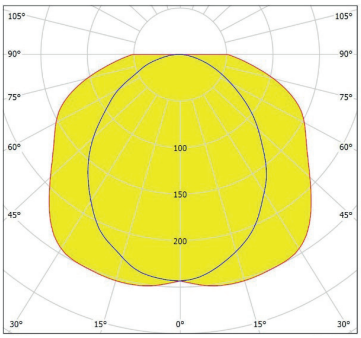

Product specifications

- light cover: polycarbonate, frosted.
- assembly-, installation- and maintenance-friendly
- CRI: > 80
- unit plate: steel
- stainless steel fastening clips
- cable entry on the side
- reflector: white
- voltage: 230/240 V, 50 Hz
- expected lifespan 100,000 Hrs (L70 / F10)

Options

- emergency/continuous lighting, incl. ATF (1 hour) from casing length 1277 mm
- colour temperature warm white (3000K)
- extern dimmable (Dali) or 1-10 V

Visit our website for the most up to date information

www.lightronics.eu

QUALITY SYSTEM CERTIFICATION DNV·GL ISO 9001: 2015
SYSTEM CERTIFICATION DNV·GL CO_2 PERFORMANCELADDER
MANAGEMENT SYSTEM CERTIFICATION DNV·GL CSR PERFORMANCE LADDER