

STREET AND OUTDOOR LIGHTING - CIRCULAR LUMINAIRE

One standard for all applications!




Smart City Ready

\* Optie

PRUNUS C





Application areas

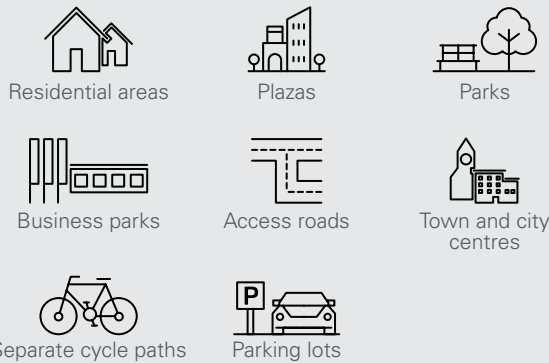

Top cover: aluminium, coated  
 Light cover: UV-stabilised polycarbonate, clear (C1 / C2), structured polycarbonate (C3), clear safety glass (C4)  
 Light source: LED



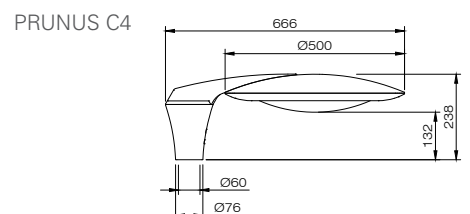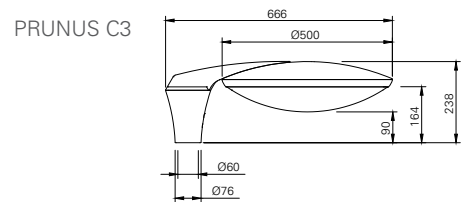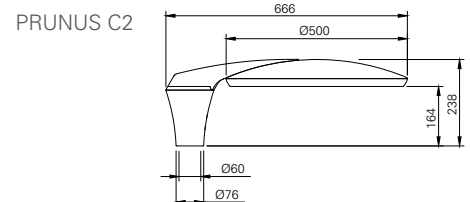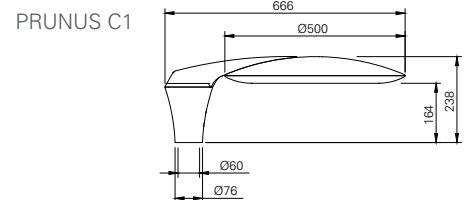

Dimensions in mm:



# Technical specifications



CIRCULAR LUMINAIRE - EASY LIGHT - 4000K				
		Lumen LEDs	LED power	LED & System power
 PRUNUS C1 / C2 / C3 / C4 16 LED		1050	7.7	8.7
		1200	6.9	9.1
		1350	7.8	10
		1500	8.8	11
		1600	9.7	11.9
		1800	11.1	13.2
		2000	11.9	14
		2150	12.8	14.9
		2300	13.4	15.5
		2500	14.8	16.9
		2750	16.3	18.4
		3000	17.9	20
		3240	19	21.4
		3500	20.5	23.1
		3780	22.3	25
	 PRUNUS C1 / C2 / C3 / C4 32 LED		4000	23.6
		4200	25.1	28.2
		3240	19	21.4
		3500	20.5	22.9
		3780	22.3	25
		4000	23.4	26.3
		4200	25.1	28.2
		4320	26.8	30.2
	4860	30.3	34	

### Product specifications


- colour temperature neutral white (4000K) or warm white (3000K)
- flat light cover (C1 / C2): polycarbonate, clear
- lens-shaped light cover (C3 / C4): structured polycarbonate (C3), safety glass, clear (C4)
- weight: approx. 5 kg (depends on model)
- assembly-, installation- and maintenance-friendly
- pole-mount size: 60 mm / 76 mm
- CRI: > 70
- voltage: 230/240 V, 50 Hz
- safety class: I
- front wind surface: 0.05 m<sup>2</sup> (C1 / C2), 0.07 m<sup>2</sup> (C3), 0.06 m<sup>2</sup> (C4)
- side wind surface: 0.06 m<sup>2</sup> (C1 / C2), 0.08 m<sup>2</sup> (C3), 0.07 m<sup>2</sup> (C4)
- standard colour: RAL 7016
- standard cable type H05BQ-F (3x1.0 mm<sup>2</sup>)
- standard Surge Protection (CM/DM): 8 kV / 6 kV
- expected lifespan 100,000 Hrs (L80 / F10)

### Options



- other RAL colour
- several dimming options: Dali, Dynadimmer (integrated in driver), 1-10 V
- other cable types/lengths
- safety class II
- various light distributions



### RGB LED-ring (optional)

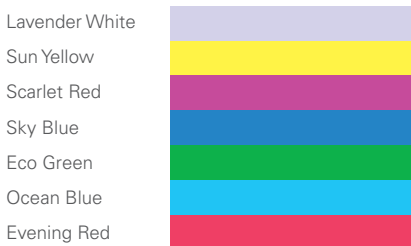- RGB LED ring: acrylic semi-transparent



Colours may differ from brochure printed colours.

DECORATIVE ELEMENTS	
	Product
	Upper LED ring
	Lower LED ring

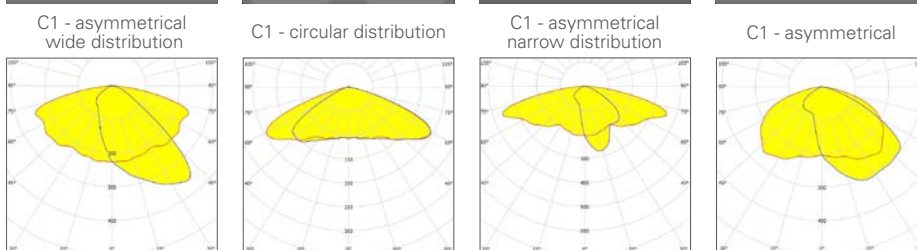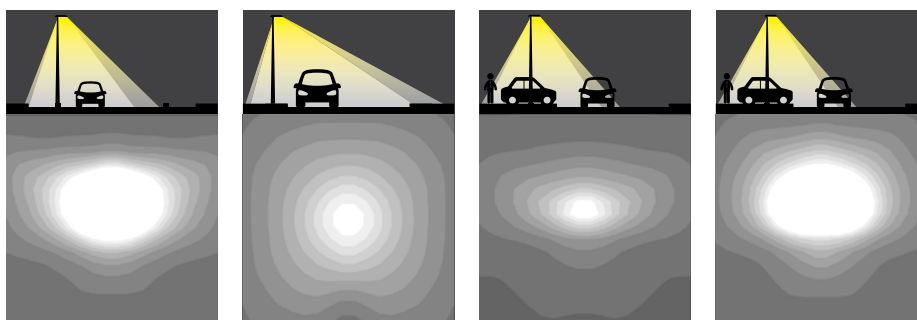

L2WG4 - 2000 lumen - LC-N    L2WG4 - 2300 lumen - LC-S    L2WG4 - 1600 lumen - LCA-2    L2WG4 - 2000 lumen - LC-O

Visit our website for the most up to date information

[www.lightronics.eu](http://www.lightronics.eu)

