



# PTK

## — SURPRISINGLY ATMOSPHERIC

The PTK has an ice-structured light cover. The robust tulip model with its classic lines is a real eye-catcher. The PTK is available in different lens configurations. This ensures light exactly where you want it in all situations and guarantees an optimal light output. Above all, it is a simple matter to integrate new LED lighting solutions in the luminaire. Making the PTK a sustainable, functional and future-proof solution for your environment.



### Application areas



RESIDENTIAL  
AREAS



CITY CENTERS



SQUARES

### Characteristics



IP 65

IK 10

CE

## PRODUCT SPECIFICATIONS

- UV-stabilised polycarbonate top cover, batch-dyed black (RAL 9005) or grey (RAL 7032)
- Light cover: UV-stabilised polycarbonate, ice-structured finish
- UniCliq-unit
- Pole-mounted size: 60 mm
- Mass:  $\pm 8$  kg (depends on model)
- Wind surface:  $\pm 0.25$  m<sup>2</sup>
- Safety class I
- Assembly-, installation- and maintenance-friendly
- Voltage: 230/240 V, 50 Hz
- CRI:  $> 70$
- Colour temperature neutral white (4000K) or warm white (3000K)
- Expected lifespan 100.000 hours at T environment = 25°C (L96/F10)
- Different lens configurations

## OPTIONS


- Pole-mounted size 76 mm
- Other RAL colour
- Dali
- Constant Lumen Output (CLO)
- Safety class II

## UNICLIQ LED UNIT

The PTK can be easily equipped with the latest lighting technology thanks to the UniCliq unit.

## DIMENSIONS PTK

in mm

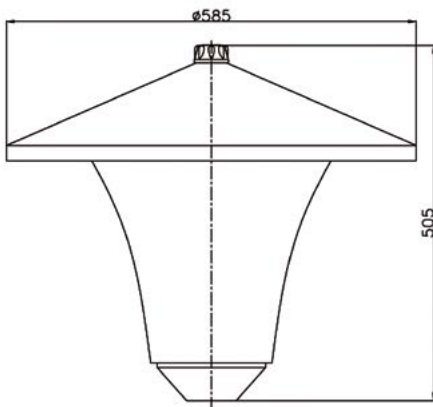

Lightronics supplies its luminaires as standard as Easy Light, with five standard dimming schedules (1A, 2A, 3A, 4A or 5A) that can switch capacity and brightness based on pre-set times.

PTK | LED<sup>2</sup>WELL CORE OUR STANDARD LIGHTING SOLUTION

Number of LEDs	Lumen	3000K		4000K	
		LED-power (W)	System power (W)	LED-power (W)	System power (W)
16	800	5,7	8,0	5,5	7,7
	1050	6,8	9,0	6,3	8,6
	1200	7,5	9,8	7,2	9,5
	1350	8,1	10,5	7,9	10,2
	1500	8,8	11,2	8,5	10,9
	1600	9,3	11,7	9,0	11,4
	1800	10,4	12,8	10,0	12,4
	2000	11,2	13,7	10,6	13,1
	2150	12,4	14,9	11,5	13,9
	2300	13,5	16,1	12,6	15,1
	2500	14,8	17,5	14,2	16,8
	2750	16,6	19,4	15,7	18,5
	3000	18,5	21,4	17,3	20,1

**LED (ICE-STRUCTURED FINISH)**

