



WALL AND CEILING LIGHTING - IMPACTPROOF

Multifunctional surface-mounted luminaire



\* Option

TPN

Application areas



Galleries



Stair wells



Entrance halls



Elevator lobbies



Porches



Storages



Front- and back doors



Housing: impactproof, flame-retardant, UV-stabilised polycarbonate

Light source: LED, T5, TC-S, TC-L



\* Option

Dimensions in mm:

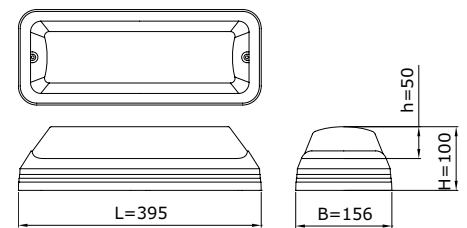



# Technical specifications

LIGHT SOURCE LED	LUMEN OUTPUT (LM)	EXPECTED LIFESPAN HR
LED	440	100,000
LED	560	100,000
LED	840	100,000
LED	1050	100,000


LIGHT SOURCE OTHER	POWER (W)
T5	1 x 8
TC-S	1 x 9
TC-S	1 x 11
TC-L	1 x 18

OPTIONS	LED	OTHER
Seperate cover opal	✓	✓
Seperate cover frosted	✓	✓
Seperate raised cover for double-sided pictogram version, clear or opal	✓	✓
Square mounting plate for emergency exit-indication	✓	✓
TPN ceiling bracket for emergency exit-indications	✓	✓
Pictogram for emergency exit-indication	✓	✓
Emergency/continuous lighting, incl. ATF (1 hour)	✓	
24 Volt DC based on 1 LEDstrip	✓	
Colour temperature warm white (3000K)	✓	✓
Cable entry at side	✓	✓
Other RAL colour	✓	✓
Safety class II	✓	✓


### Product specifications

- light cover polycarbonate, clear prismatic, opal or frosted
- aluminium mirror reflector (not for LED)
- cable entry: at the back
- assembly-, installation- and maintenance-friendly
- voltage: 230 / 240 V, 50 Hz
- CRI: > 80
- colour temperature neutral white (4000K)
- lifespan LED (driver + LED) 100,000 Hrs at T-ambient is 25°C (L70 / F10)

TPN Frosted LED



TPN Opal LED



Visit our website for the most up to date information:

[www.lightronics.eu](http://www.lightronics.eu)

